



SURFACE MOUNT

# RF Transformer

## TC4-19+

TC4-19X+  
Upgraded Version\*

Mini-Circuits

50Ω 10 to 1900 MHz

- \*Addition of Top Hat® feature Benefits**
- Allows faster pick-and-place
  - Enables visual identification marking

### FEATURES

- Wideband, 10-1900 MHz
- Balanced transmission line with secondary center tap
- Plastic base with leads
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: AT224-1A

### +RoHS Compliant

The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications

### APPLICATIONS

- PCS
- Cellular

### ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (secondary / primary)			4		
Frequency Range		10		1900	MHz
Insertion Loss*	10-1900		3		dB
	20-1000		2		
	30-700		1		
Amplitude Unbalance	30-700		0.3		dB
	20-1000		0.5		
Phase Unbalance	30-700		4		Degree
	20-1000		6		


\* Insertion Loss is referenced to mid-band loss, 1.0 dB typ.

### MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

### CONFIG. H

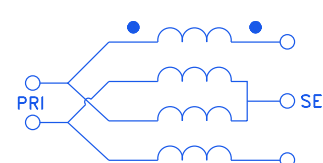

REV. B  
ECO-015303  
TC4-19+  
MCL NY  
220906






### PIN CONNECTIONS


PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	2

PRODUCT MARKING: NA

### OUTLINE DRAWING

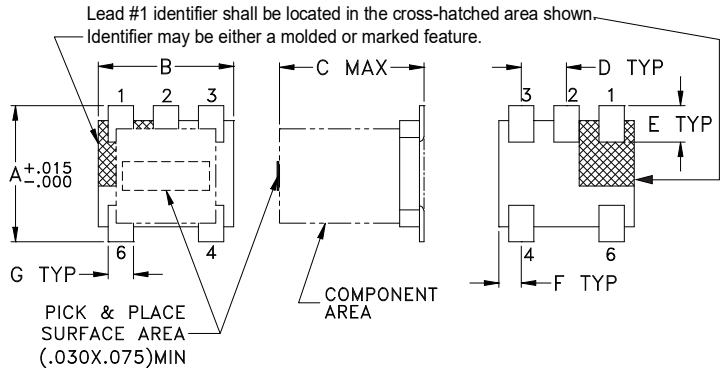

### PCB Land Pattern



Suggested Layout,  
Tolerance to be within ±.002

### OUTLINE DIMENSIONS (Inch/mm)

A	B	C	D	E	F
.150	.150	.160	.050	.040	.025
3.81	3.81	4.06	1.27	1.02	0.64
G	H	J	K	wt	
.028	.065	.190	.030	grams	
0.71	1.65	4.83	0.76	0.15	

### TAPE & REEL INFORMATION: F17



SURFACE MOUNT

# RF Transformer


## TC4-19+

50Ω 10 to 1900 MHz


### TYPICAL PERFORMANCE DATA

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (deg.)
10.00	1.24	16.03	0.06	0.03
50.00	1.04	19.54	0.04	0.39
100.00	0.99	19.98	0.01	0.83
500.00	1.13	14.68	0.02	3.20
700.00	1.24	12.43	0.17	3.49
1000.00	1.55	9.92	0.49	3.74
1200.00	1.80	8.83	0.85	3.53
1500.00	2.34	7.69	1.47	3.59
1700.00	2.64	7.26	1.74	4.43
1900.00	2.99	7.01	1.95	4.99

INSERTION LOSS

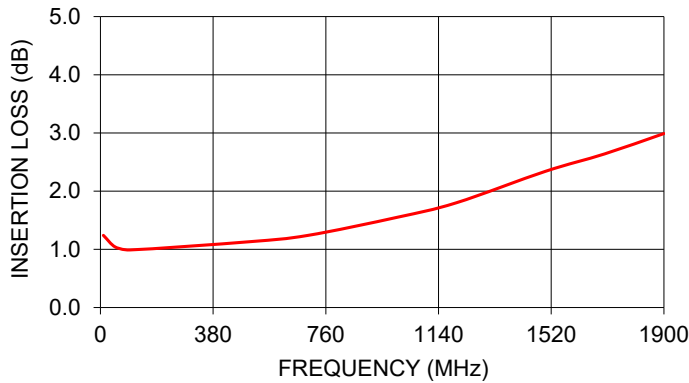

INPUT RETURN LOSS

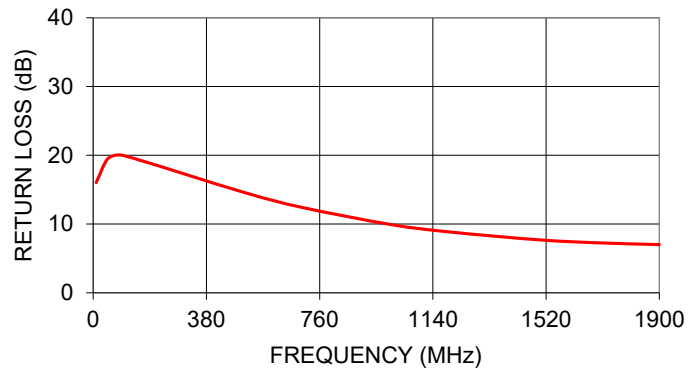

**NOTES**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

